



King Harbor Yacht Club

Mark Guide Rev. 03/15/13

This information is for your guidance. Mark positions will change from time to time, a condition beyond our immediate control. You are responsible for your own navigation.

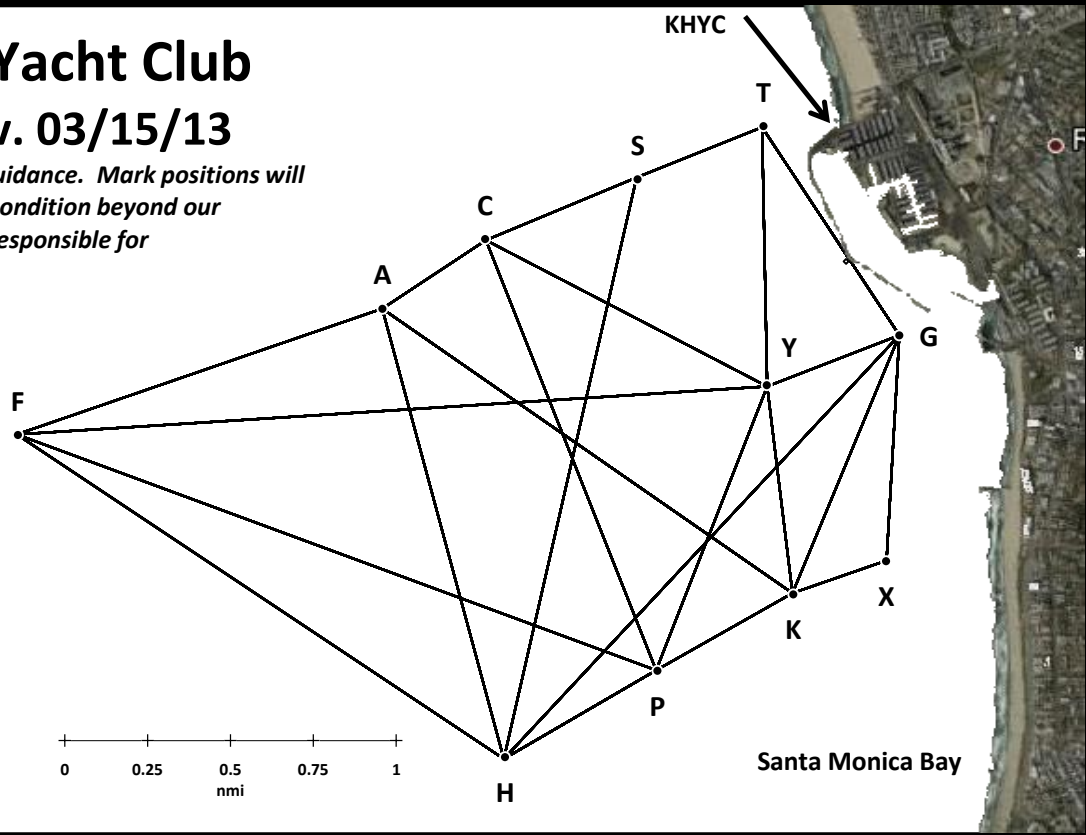

Approximate Mark Locations

Racing Mark	N Latitude			W Longitude			Buoy Type	Racing Mark	N Latitude			W Longitude			Buoy Type
	Deg	Min	Sec	Deg	Min	Sec			Deg	Min	Sec	Deg	Min	Sec	
T-Mark	33	51	00.6	118	24	16.9	Yellow Spar	W-Mark	33	50	28.9	118	23	41.0	RB-MC1
S-Mark	33	50	51.5	118	24	44.3	Yellow Spar	M-Mark	33	51	35.0	118	24	58.0	Inflatable
C-Mark	33	50	40.2	118	25	17.1	Yellow Spar	N-Mark	33	51	23.9	118	25	45.1	Inflatable
A-Mark	33	50	27.8	118	25	39.7	Yellow Spar	mdrDD-Mark	33	56	38.8	118	30	53.9	Yellow Spar
F-Mark	33	50	05.1	118	26	59.4	Yellow Spar	mdrSS-Mark	33	57	32.8	118	28	05.6	Yellow Spar
Y-Mark	33	50	13.8	118	24	15.8	Yellow Spar	Malibu BW	34	02	00.6	118	40	21.1	Mooring
G-Mark	33	50	23.0	118	23	47.0	Bell Buoy	"10PV" red	33	46	24.0	118	26	42.0	Bell Buoy
X-Mark	33	49	42.3	118	23	49.8	Yellow Spar	Pt. Vicente	33	44	16.8	118	24	52.2	Outer Rock
K-Mark	33	49	36.4	118	24	10.3	Yellow Spar	"6PF"	33	41	55.8	118	17	30.1	Bell Buoy
P-Mark	33	49	22.5	118	24	40.0	Yellow Spar	Angels Gate	33	42	31.0	118	15	05.4	LA Light
H-Mark	33	49	06.5	118	25	13.2	Yellow Spar	CBYC 82	33	43	03.6	118	13	33.6	Yellow Spar

Approximate Magnetic Heading/Distance in nmi

From → To ↓	A	C	F	G	H	K	P	S	T	Y	X
A		224/0.4	058/1.2	260/1.6	332/1.4	292/1.5	310/1.4	230/0.9	232/1.3	269/1.2	284/1.7
C	044/0.4		055/1.5	270/1.3	345/1.6	306/1.4	326/1.4	235/0.5	235/0.9	285/1.0	296/1.5
F	238/1.2	235/1.5		251/2.7	291/1.8	269/2.4	277/2.1	235/2.0	235/2.4	254/2.3	266/2.7
G	080/1.6	090/1.3	071/2.7		030/1.7	010/0.8	023/1.2	108/0.9	134/0.8	056/0.4	351/0.7
H	152/1.4	165/1.6	111/1.8	210/1.7		228/1.0	227/0.5	180/1.8	190/2.1	203/1.4	230/1.3
K	112/1.5	126/1.4	089/2.4	190/0.8	048/1.0		048/0.5	147/1.3	164/1.4	160/0.6	238/0.3
P	130/1.4	146/1.4	097/2.1	203/1.2	047/0.5	228/0.5		165/1.5	178/1.7	189/0.9	232/0.8
S	050/0.9	055/0.5	055/2.0	288/0.9	000/1.8	327/1.3	345/1.5		236/0.4	315/0.7	314/1.4
T	052/1.3	055/0.9	055/2.4	314/0.8	010/2.1	344/1.4	358/1.7	056/0.4		346/0.8	331/1.4
Y	089/1.2	105/1.0	074/2.3	236/0.4	023/1.4	340/0.6	009/0.9	135/0.7	166/0.8		313/0.6
X	104/1.7	116/1.5	086/2.7	171/0.7	050/1.3	058/0.3	052/0.8	134/1.4	151/1.4	133/0.6	